

Product presentation


Conceiling DRS 125 diffuser is designed for installation with stretch ceilings. It can be installed in any diffuser box or a spiral duct, and after leveling it is fixed in the final position with screws. After tensioning the stretch ceiling, it is pressed against the diffuser body with a clamping ring using the screws with countersunk heads included in the kit. To facilitate clamping, it is recommended to heat the ceiling. The remaining ceiling residue in the middle is cut off and the diffuser cover with screw covers is placed on the clamps on the clamping ring. The cover has a textured pattern that matches the texture of the most popular ceilings. The white shade of the cover matches the shades of the most commonly installed ceilings, e.g. MSD Premium. In case of a significant color mismatch, the same stretch ceiling film can be easily glued onto the diffuser cover. Thanks to the unique diffuser design, the air flow is directed sideways along the ceiling, rather than straight down, thus avoiding unpleasant direct air drafts. The diffuser can be designed above sensitive areas, such as a bedroom bed, living room sofa or work desk.



[Installation manual](#)

[Product page](#)



Product dimensions

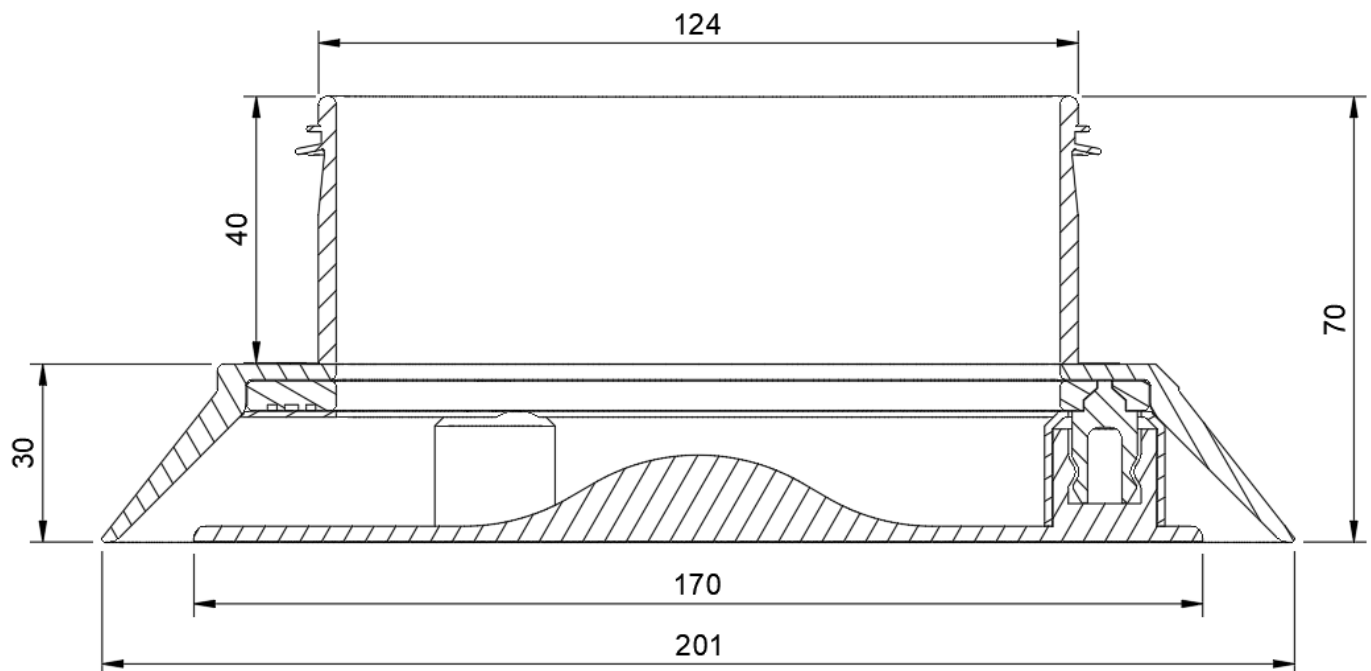

Product specification

Technical	
Colour	White
Shape	Round
Connection diameter	125 mm
Performance	
Recommended maximum airflow	90 m ³ /h
Temperature resistance (min-max)	5-60 °C
Reaction to fire: Euro class	B1 (self-extinguishing)
Dimensions	
Length	201 mm
Width	201 mm
Housing height	30 mm
Total height	70 mm
Weight	0,3 kg

Technical details

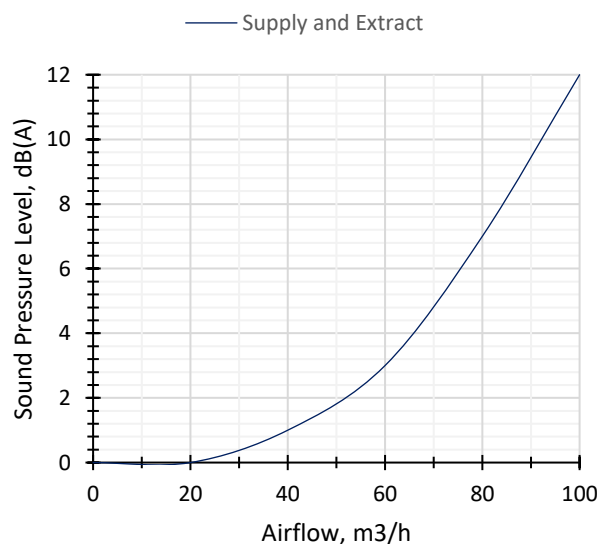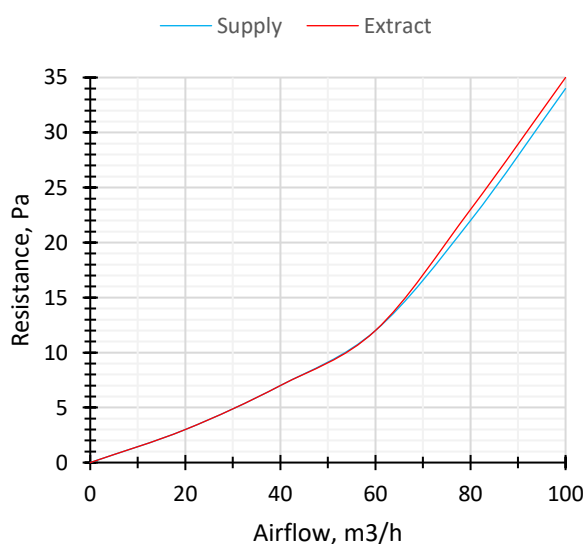

DRS 125

Round air diffuser for stretch ceiling with 125mm connection
More information at <https://conceiling.com>

Airflow distribution

