




Elastic duct silencer for effective noise reduction, dedicated for installation on the HRV unit air supply and extract connections. Inner surface made out of perforated duct covered with 25 mm thick insulation from glass, covered by aluminium-polyester jacket



- ⌚ Duct silencer 1 m long available in 3 diameters: Ø125, Ø160 and Ø200
- ⌚ Male end with gasket on both sides ensuring air tight connection
- ⌚ Effective noise reduction
- ⌚ Insulation of mineral wool:  $\lambda=0,029$  W/mK

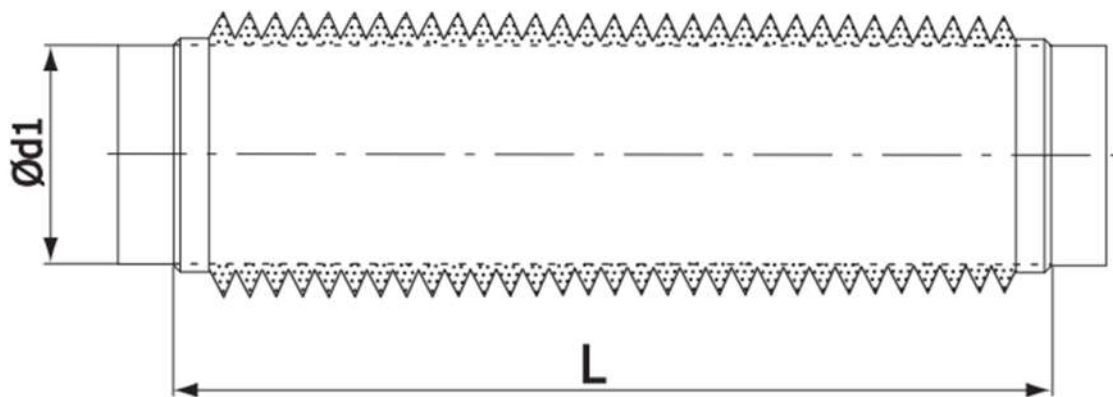

## DUCT SILENCER ARIA ADURO





DESIGNATION	DIMENSION		MATERIAL	CATALOGUE NO.
	Length L	Nominal diameter Ød1		
BL 125	1000 mm	125 mm	Aluminium-polyester jacket, galvanized steel sheet, EPDM rubber, glass wool	520 103 001
BL 160		160 mm		520 104 001
BL 200		200 mm		520 105 001

DESIGNATION	SOUND INSULATION [dB] at frequency [Hz]						
	125	250	500	1000	2000	4000	8000
BL 125	30	36	30	34	32	25	12
BL 160	17	29	28	30	30	23	11
BL 200	24	30	23	26	27	16	10

## DUCT SILENCER ARIA ADURO

### Pressure loss - Duct silencer ARIA ADURO

